


MS5203

Digital Insulation Tester

INSULATION TESTERS

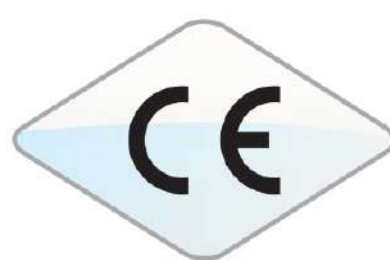

SPECIFICATIONS

	Source Output Voltage	Measuring Range
Insulation Tests	50V(0%~+20%)	0.01MΩ~50MΩ±(3%+5)
	100V(0%~+20%)	0.01MΩ~100MΩ±(3%+5)
	250V(0%~+20%)	0.01MΩ~250MΩ±(3%+5)
	500V(0%~+20%)	0.01MΩ~500MΩ±(3%+5) 1.00GΩ~5.00GΩ±(5%+0.1GΩ)
	1000V(0%~+20%)	5.00GΩ~10.00GΩ±(10%+0.2GΩ)
Short Circuit Current	Approx. 2mA	
Multimeter Functions	DC Voltage Test	0.1~1000V±0.5%
	AC Voltage Test	0.1~750V±1%
	Continuity Test	0.01Ω~200Ω±0.5%

FEATURE

Features	Auto Calculate PI and DAR
	Store /Load Function
	Compare function
	Auto discharge for capacitive load
	Timer Function for insulation test
	Lock function for insulation test
	Low Battery Indication
	DCV and ACV Test
	Continuity test
	Auto power Off
	Digital and analog display

GENERAL

General	Power Supply	6x1.5V AA batteries
	Product Size	194x150x72mm
	Product Weight	Approx. 950g
	Safety Rating	EN61010-1,EN61557-1,EN61326-1 CAT.III 1000V CAT.IV 600V